

NOVUM ELECTRIC

Jetting Equipment RENTAL

**PLUMETT**

**2024**

[WWW.NOVUM-ELECTRIC.PL](http://WWW.NOVUM-ELECTRIC.PL)

## OptiJet™ Reporting



### SEMI-AUTOMATIC CABLE BLOWING UNIT



**PUSHING FORCE**  
8-150 KN



**MAX SPEED**  
100 M/MIN



**CABLE DIAMETER**  
1.5-8.0 MM



AUTOMATIC CRASH TEST

THE ABILITY TO CREATE PDF REPORTS

#### SPECIFICATION

Type	Reporting
Cable dia. [mm]	1.5-8.0
Duct OD [mm]	3.0-16
Drive unit	Built-in electric motor (4 batteries included)
Pushing force [N]	8-150
Max. speed [m/min]	100
Max. air pressure [bar]	16
Dimension of apparatus l x w x h [mm]	310 x 385 x 395
Dimension of apparatus with case l x w x h [mm]	620 x 420 x 410
Dimension of tools and accessories case l x w x h [mm]	620 x 420 x 410
Weight of machine [kg]	19
Total shipping weight [kg]	45

#### ALL THE KNOW-HOW OF PLUMETTAZ CONDENSED IN THE MOST RECENT TECHNOLOGIES

Its automatic crash test of the pushing force and radial force on the cable, ensures the best performance for laying the cable while protecting it. And thanks to its speed of 100 m/min, the OptiJet™ is very efficient in optimising working time.

#### The OptiJet™ provides you the following key elements:

- Automatic crash test
  - Automatic speed control
  - The ability to create PDF reports
  - A wireless tablet (Reporting version only)
  - A "boost" mode to increase the pushing force for strong cables
- Continuous monitoring of the pushing force and slippage between the cable and the belts with automatic shutdown in case of overshoot, to prevent damage

## IntelliJet™



### BLOWING MACHINE MONITOR



**PUSHING  
FORCE**  
0-300 KN



**MAX  
SPEED**  
125 M/MIN



**CABLE  
DIAMETER**  
4-16 MM



REMOTE MONITORING

EFFICIENT

#### SPECIFICATION

Type	P02
Cable dia. [mm]	4-16
Duct OD [mm]	7-42
Drive unit	Pneumatic
Max. air consumption of motor [m <sup>3</sup> /min]	0.5 (at 4 bar)
Pushing force [N]	0-300
Max. speed [m/min]	125
Max. air pressure [bar]	16
Max. water pressure [bar]	25
IntelliBox™, TFT display size ["]	7
IntelliBox™, battery life [h]	16
IntelliBox™, protection rating [IP]	65
Dimension of IntelliJet™ l x w x h [mm]	520 x 375 x 300
Dimension of IntelliBox™ l x w x h [mm]	270 x 250 x 180
Dimension of IntelliJet™ with case l x w x h [mm]	620 x 420 x 340
Dimension of IntelliBox™ with case l x w x h [mm]	620 x 420 x 310
Dimension of tools and accessories case l x w x h [mm]	620 x 420 x 310
Weight of IntelliJet™ and IntelliBox™ [kg]	29
Total shipping weight [kg]	56

#### STANDARD EQUIPMENT:

- 1 box for the IntelliJet™
- 1 box for tools, inserts, wear parts and consumables (seals, lubricant, etc.)
- 1 set of tools
- 1 speed and distance indicator
- 1 holder to fix the base plate of the IntelliBox™
- 1 air hose with quick release coupling Mody to connect to compressor /
- 2 belts V (Poly-V) / 1 bottle of lubricant Jetting Lube
- 1 bottle of lubricant Micro Jetting Lube
- 1 operation and maintenance manual

## Intelli-MicroJet PRM-196

### BLOWING MACHINE MONITOR



**PUSHING  
FORCE**

0-25/0-150 KN




**MAX  
SPEED**

120 M/MIN



**CABLE  
DIAMETER**

1.0-8.0 MM

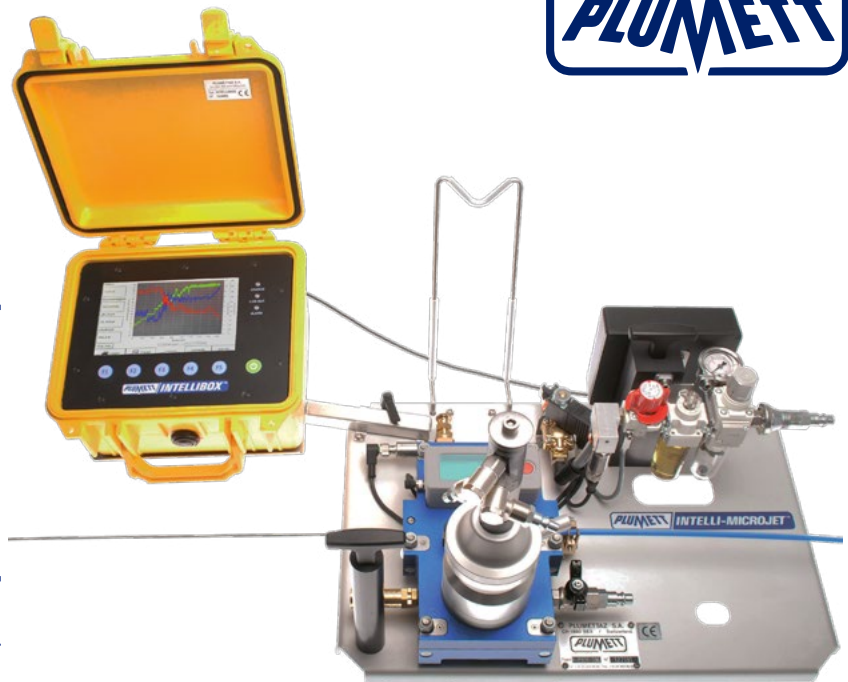

REMOTE MONITORING

COMPACT DESIGN

#### SPECIFICATION

Type	PRM-196
Cable dia. [mm]	1.0-8.0
Duct OD [mm]	3.0-16
Drive unit	Pneumatic
Max. air consumption of motor [m <sup>3</sup> /min]	0.2 (at 6 bar)
Pushing force [N]	0-25/0-150
Max. speed [m/min]	120
Max. air pressure [bar]	16
IntelliBox™, TFT display size ["]	7
IntelliBox™, battery life [h]	16
IntelliBox™, protection rating [IP]	65
Dimension of Intelli-MicroJet™ l x w x h [mm]	520 x 350 x 360
Dimension of IntelliBox™ l x w x h [mm]	270 x 250 x 180
Dimension of Intelli-MicroJet™ with case l x w x h [mm]	620 x 420 x 410
Dimension of IntelliBox™ with case l x w x h [mm]	620 x 420 x 310
Weight of Intelli-MicroJet™ and IntelliBox™ [kg]	18
Total shipping weight [kg]	37
Weight of IntelliJet™ and IntelliBox™ [kg]	29
Total shipping weight [kg]	56

#### STANDARD EQUIPMENT:

- 1 box for the Intelli-MicroJet™ and its accessories
- 1 set of tools
- 1 speed and distance indicator
- 1 holder to fix the base plate
- of the IntelliBox™
- 1 air hose with quick release coupling Mody to connect to compressor
- 1 driving wheel without steel tyre
- 1 pressure wheel (aluminium)
- 1 bottle of lubricant Micro Jetting Lube
- 1 operation and maintenance manual

# NOVUM ELECTRIC



**NOVUM-ELECTRIC**  
UL. ŚWILCZA 147 YA, 36-072 ŚWILCZA

MOBILE: +48 530 289 328  
MAIL: RAFAL@NOVUM-ELECTRIC.PL

[WWW.NOVUM-ELECTRIC.PL](http://WWW.NOVUM-ELECTRIC.PL)